

FIX EASILY (VHF+UHF) INDOOR ANTENNA

Special Features

RECEPTION FREQUENCY
VHF: 160-230MHz
UHF: 470-862MHz

LOW-N-UP GAIN
VHF: 32dB
UHF: 38dB

Working voltage
(DC6V/50mA)

HEITECH Art.Nr.09001089
"DVB-T" Zimmerantenne mit Verstärker

INSTALLATION MANUAL

Excellent reception for digital terrestrial signals and radio programs

Receives both horizontal signals and vertical signals

To be powered by digital receiver(5V/30mA) via aerial cable and included AC/DC adaptor

Wide band amplifier for best picture and sound reception

Compact size flat-panel

Power-on indicator

Signal clear technology with extremely low noise circuitry




NOICE

Stop using in the thunder day.

When stop using, please turn off the power.

If it can't receive well, please adjust the antenna and try again.

1 Signal cable connection when applied to DVB-T receiver **OR** Signal cable connection when applied to Digital TV

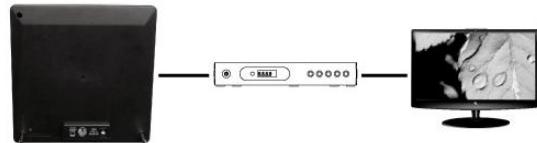

When applying to analog TV, connect the antenna with the signal output of the digital receiver. Connect digital receiver with TV set.
When apply to digital TV, use the provided cable or other suitable cable, connect the power adapter to the output socket and plug into a standard power outlet.

2 Connect to TV



Connect the end of the coaxial cable to the RF input socket of TV set.

3 Adjustment on receiving direction



Adjust the antenna position according to the broadcast of horizontal or vertical signals.



FIX EASILY (VHF+UHF) INDOOR ANTENNA

Technischen Spezifikationen

Empfangsfrequenz
VHF: 174-230MHz
UHF: 470-862MHz

Verstärkung
VHF: 32dB
UHF: 38dB

Betriebsspannung
(DC6V/50mA)

HEITECH Art.Nr.09001089
"DVB-T" Zimmerantenne mit Verstärker

INSTALLATION MANUAL

Optimaler Empfang der digitalen terrestrischen Signale (DVB-T)
Sofort Einsatzbereit.

Die horizontalen und vertikalen Signale werden durch Amplifikationstechnik, mit eingebauter Rausch-Unterdrückung und „Hochleistungs Verstärker“ bearbeitet um die Qualität des Bildes und den Sound-Effekt optimal zu gewährleisten.

AC/DC - Adapter
Betriebsanzeige

Hinweis

Bei Nichtgebrauch schalten Sie das Gerät aus.

Sollten Sie schlechten Empfang haben, positionieren Sie einfach die Antenne neu.

Signalkabel Verbindung: Für analoge Kanäle


oder

Signalkabel Verbindung: Für digitale Kanäle



1 Bei der Benutzung des analog TV- verbinden Sie die Antenne mit dem Signalausgang des Digital-Receiver. Anschließend den Digital-Receiver mit dem TV-Gerät.

Antenne verbunden mit dem TV-Gerät

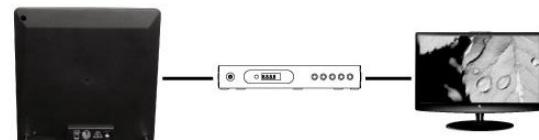

Zur Benutzung des Digital-TV verwenden Sie das mitgelieferte oder ein anderes geeignetes Kabel.
Das Netzteil wird in eine Standard 220 Volt Steckdose eingesteckt.

2 Verbinden Sie das Ende des Koaxialkabels mit dem HF-Eingang des TV-Gerätes



3 Anpassung an Empfangsrichtung



Horizontal



Vertikal